

Battery Construction

COMPONENT Raw material	POSITIVE PLATE Lead dioxide	NEGATIVE PLATE Lead	CONTAINER ABS	COVER ABS	SAFETY VALVE Rubber	TERMINAL Copper/Plug	SEPARATOR Fiberglass	ELECTROLYTE Sulfuric acid
---------------------------	--------------------------------	------------------------	------------------	--------------	------------------------	-------------------------	-------------------------	------------------------------

Performance Characteristics

- **Nominal Voltage** 12V
- **Number of Cell**..... 6
- **Nominal Capacity (77°F /25°C)**
 - 20 Hour rate (0.16A, 10.5V) 3.2Ah
 - 10 Hour rate (0.3A, 10.5V) 3.0Ah
 - 5 Hour rate (0.54A, 10.5V) 2.97Ah
 - 1 Hour rate (1.95A, 9.6V)..... 1.95Ah
- **Internal Resistance**
 - Fully charged battery (77°F /25°C) 45mΩ
- **Capacity affected by temperature (10 hour rate)**
 - 104°F (40°C) 102% 32°F (10°C) 85%
 - 77°F (25°C) 100% 5°F (-15°C) 65%
- **Self-Discharge 68°F (20°C)**
 - Capacity after 3 month storage 90%
 - Capacity after 6 month storage 80%
 - Capacity after 12 month storage 60%
- **Max. discharge current 77°F /25°C** 48A(5S)
- **Charge Methods: constant voltage charge 77°F /25°C**
 - Cycle use 14.5 ~ 14.9V
 - Max. Current 0.8A
 - Standby use 13.6 ~ 13.8V

Dimensions and Weight


Type	Length	Width	Height	Total Height	Approx. Weight
SI Units	134mm	67mm	61mm	67mm	1.25Kg
English Units	5.28inch	2.64inch	2.40inch	2.64inch	2.76lbs

Constant Current Discharge (Amperes at 77°F/25°C)

V/cell	5min	10min	15min	30min	1h	3h	5h	10h	20h
1.60	11.5	8.30	5.82	3.35	1.92	0.86	0.58	0.32	0.165
1.65	10.9	7.90	5.60	3.23	1.84	0.83	0.57	0.31	0.165
1.70	10.3	7.50	5.38	3.11	1.76	0.80	0.55	0.31	0.160
1.75	9.70	7.05	5.13	2.99	1.68	0.78	0.54	0.30	0.160
1.80	9.05	6.60	4.83	2.85	1.60	0.73	0.51	0.29	0.155

General Features

- **Absorbent Glass Mat (AGM) technology for efficient gas recombination of up to 99% and freedom from electrolyte maintenance or water adding.**
- **Not restricted for air transport-complies with IATA/ICAO Special Provision A67.**
- **A recognized component of CE and UL**
- **Computer designed lead, calcium tin alloy grid for high power density.**
- **Long service life, float or cyclic applications.**
- **Maintenance-free operation.**
- **Low self discharge**
- **Design life 5 years**

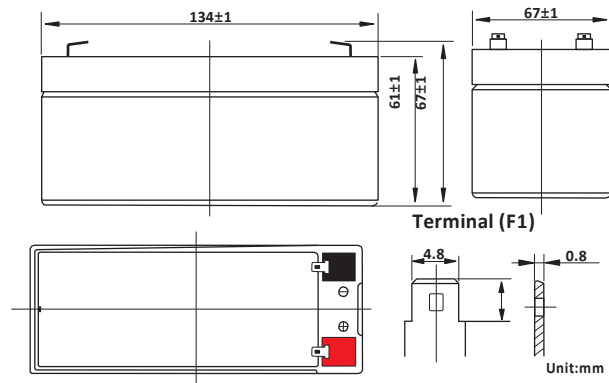

Constant Power Discharge (Watts at 77°F/25°C)

V/cell	5min	10min	15min	30min	45min	1h	2h	3h	5h
1.60	21.6	14.4	11.1	6.75	5.02	3.86	2.13	1.67	1.15
1.65	20.3	13.6	10.5	6.40	4.79	3.70	2.07	1.63	1.13
1.70	19.0	12.7	9.88	6.06	4.55	3.52	1.99	1.59	1.10
1.75	17.7	11.9	9.30	5.71	4.30	3.35	1.92	1.54	1.08
1.80	16.3	11.1	8.69	5.36	4.05	3.16	1.83	1.49	1.05

(Note: The above characteristics data are average values obtained within three charge/discharge cycles not the minimum values.)

