


ACCUKABEL

ACCUKABEL:

1x16 mm², 1x25 mm², 1x35 mm², 1x50 mm², 1x70 mm²,
1x95 mm², 1x120 mm²

Bending Radius: x10 external diameter for fixed layings

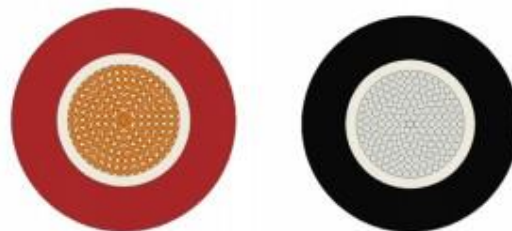

CONSTRUCTION

Conductor	Electrolytic/ Tinned Annealed Copper (Class 5)
Insulation	PVC (Natural)
Sheath	NBRPVC (RAL3000 Red/ RAL9005 Black)
Cable Diameter (± 5%)	16 mm ² : 9.20
	25 mm ² : 10.40
	35 mm ² : 11.30
	50 mm ² : 13.10
	70 mm ² : 15.30
	95 mm ² : 17.40
	120 mm ² : 19.60



CABLEMARKING

DGR [CROSS SECTION] IEC245-6 WW/YYYY  [METERMARK] [LOTNO-PARTNO]

TECHNICAL AND ELECTRICAL PROPERTIES (20 °C)

Operating Voltage	0.6/1kV
Test Voltage	3.5kV
Temperature Range	-40°C ~ +70°C

